


Creative


Advance Business PBX

01101101010100101010101010101010

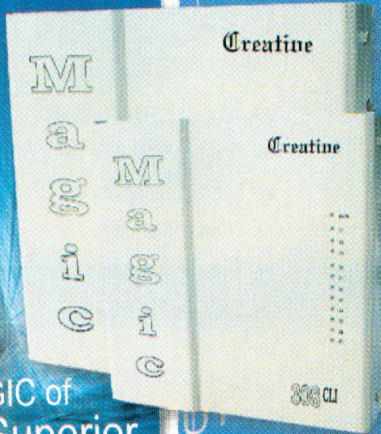

Feel the MAGIC of Superior Connectivity

MAGIC - CLI

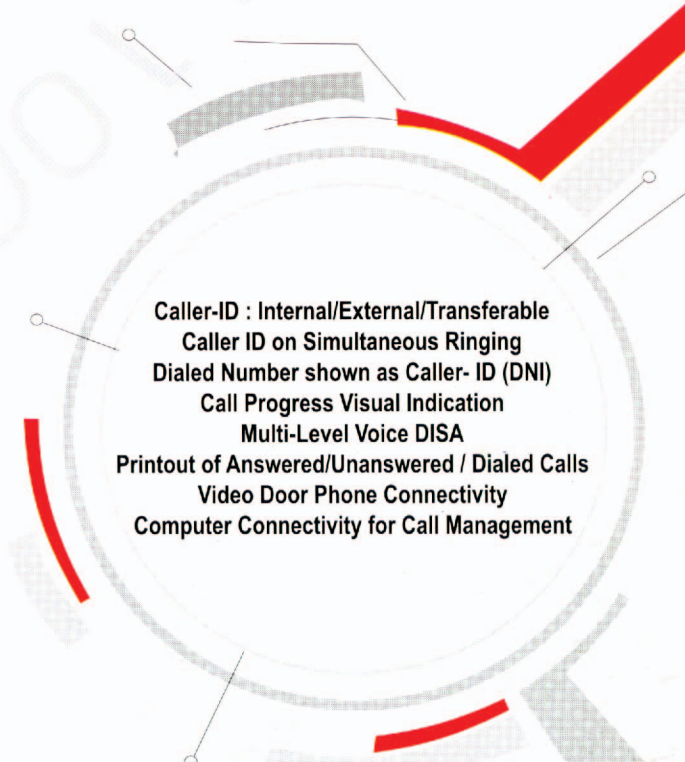

- Caller-ID : Internal/External/Transferable
- Caller ID on Simultaneous Ringing
- Dialed Number shown as Caller- ID (DNI)
- Call Progress Visual Indication
- Multi-Level Voice DISA
- Printout of Answered/Unanswered / Dialed Calls
- Video Door Phone Connectivity
- Computer Connectivity for Call Management

JAS-ANZ



ISO 9001 : 2000

MAGIC

Advance Business PBX



Unique features of Magic CLI

- ▶▶ Caller-ID : Internal/External/Transferable
- ▶▶ Caller -ID on Simultaneous Ringing
- ▶▶ Dialed Number shown as Caller- ID (DNI)
- ▶▶ Call Progress Visual Indication
- ▶▶ Printout of Answered/Unanswered/Dialed Calls
- ▶▶ Computer Connectivity for Call Management
- ▶▶ Dynamic STD/ISD Lock for all Extensions
- ▶▶ Walking Class of Service
- ▶▶ Accepted & Denied Tables ("95" dialing lock)
- ▶▶ Auto Call Disconnection
- ▶▶ Extension/Trunk Grouping
- ▶▶ Call Budgeting
- ▶▶ Auto Callback on No Reply
- ▶▶ KTS Connectivity
- ▶▶ Auto Redial
- ▶▶ External Call Forwarding
- ▶▶ Restricted Global Memory Dialing
- ▶▶ Programmable Local/STD/ISD Call Duration
- ▶▶ DISA with Voice Message (4 level)

Exclusive Features (Available in 824/832)

- ▶▶ Check-in / Check-out
- ▶▶ Flexible Numbering
- ▶▶ Storey Phone
- ▶▶ Room to Room Barring
- ▶▶ KTS Connectivity- 2 key Phone ports




Creative Telecom Pvt. Ltd.

Head office :-162, DSIDC Complex, Okhla Industrial Area, Phase-1, New Delhi - 110020
Phone : 011-26817414/15,26811492/96, Fax : 011-26811389, e-mail : sales@creativetele.com


Kolkata :- 17/ 1B, Jatini Das Road, Near Lake Market, Kolkata Phone : 033-32545247,
24635560, Mobile : 09330998007, e-mail : creativeandconcept@vsnl.net, kolkata@creativetele.com

Chennai :- Plot No. 18, Flat No. B, Ground Floor, Punjab Garden Street, West Mambalam, Chennai,
Tamil Nadu Phone : 044-24819880,24819881 Mobile : 9282228703, e-mail : creativegk@vsnl.net

Mumbai :- C/315-320, Solaris - I, Opp. L&T Gate No.6, Saki Vihar Road, Andheri - East,
Mumbai - 400 072, Telefax : 022-28575637, Mobile : 09892883415,
e-mail : mumbai@creativetele.com

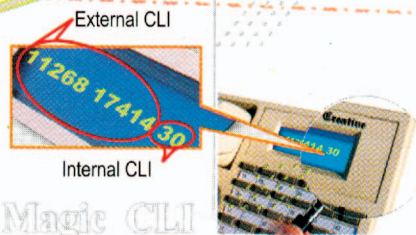

Call Progress Visual Indication

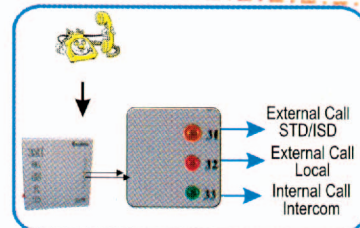


Distinctive Features

- ▶▶ Remote Maintenance
- ▶▶ Auto Fax-Tel Switch
- ▶▶ DOSA Remote Dialing (Open/ Restricted)
- ▶▶ Built-in Printer Interface with Buffer Memory
- ▶▶ Various options for SMDR Printing
- ▶▶ Direct Call billing in Rupees
- ▶▶ Programmable Secret Code
- ▶▶ Delayed Hot Line
- ▶▶ Trunk/Extension/System Status Display
- ▶▶ Automatic Call Distribution
- ▶▶ Call Waiting on P & T Lines

Efficient Features

- ▶▶ Tone/ Pulse Switchable
- ▶▶ Personnel Speed Dialing
- ▶▶ Boss Secretary System
- ▶▶ Broker's Call
- ▶▶ STD/ISD/Local Call Control
- ▶▶ Programmable Flash Timing of Individual Extension
- ▶▶ Call Consult with a Busy Extension
- ▶▶ Call Duration Beep Alert on CO Lines
- ▶▶ Alarm (Self/ Daily/ Same day / Duration)
- ▶▶ Emergency Reporting
- ▶▶ Manual/ Auto Day & Night Mode
- ▶▶ Paging

DISA with Voice Message

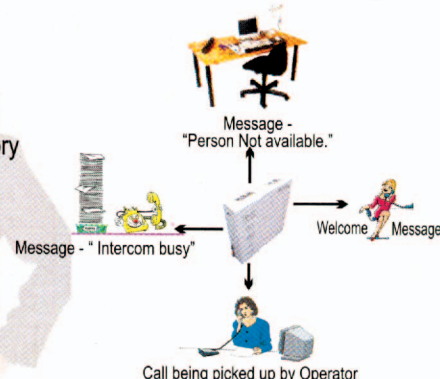

Regular Features of Magic CLI

- ▶▶ Auto Call Back on Busy Extension / Trunk
- ▶▶ Do Not Disturb on Selective Extension
- ▶▶ Auto Camp- On at Busy Extension
- ▶▶ Distinctive Ring for Internal/External Calls
- ▶▶ Internal/ External Hot-line
- ▶▶ Call Forwarding
- ▶▶ Call Pick - up Groups
- ▶▶ Various Extension Hunt Groups
- ▶▶ Operator Less Operation
- ▶▶ Call Conference
- ▶▶ Call Camp- On Tone
- ▶▶ Call Parking
- ▶▶ Parked Call Pick -up from any Extension
- ▶▶ Auto reminder for Parked Call
- ▶▶ Call Privacy
- ▶▶ External Music Interface

System Specifications

Technology	SPC
Switching	SDM with Cross Point Switching
Program Storage	Flash RAM
Extension Loop Resistance	600Ω
Junction Loop Resistance	1200Ω
Dialing	Decadic
	10 PPS, MB 1:2
	As per CCITT Q23
Power Source	220 VAC, 50 Hz
Battery Backup	24V DC
Max Operating temp	50° C

Physical Specifications

Model	Configuration	Dimensions
308	3 P&T 8 Extensions	300x295x70
616	6 P&T 16 Extensions	360x330x75
832	8 P&T 24 Extensions 8 P&T 32 Extensions	460x330x70

Due to continuous up gradation technical specifications and features are subject to change without prior notice

Authorised Dealer

